



ILE

Powerful Three Way Tower Speaker

The two channel amplifier powers a total of 3 pass-bands in the ILE. The bass section consists of four long excursion woofers powered by 700 watts. The highly efficient mid/high range are also powered 700 watts of power. A passive crossover network divides the audio signal for the 4x 5" coaxial mids/high drivers.

Paraline Lense Technology

The ILE3 utilizes (4) x 5"/1" coaxial drivers coupled to Danley's patented Paraline™ lens technology. The ILE3 features a 140° horizontal x 20° vertical dispersion pattern. This yields superior performance and a completely immersive experience.

Long Excursion Woofers


ILE produces bass like no other full-range speaker available. With clarity, punch and intensity. Ignite your senses with breathtaking bass that will easily envelop your room.

Self Powered with FIR Processing

The on-board power amp saves you the trouble of amp matching your speakers. It's also equipped with Tom Danley's settings to insure optimal performance. As seen in the graph below, perfect response has been achieved through this processing.



Speaker type _____	3-Way Powered
Maximum SPL _____	125 dB SPL
High Frequency _____	4x 1"
Low/Mid Range _____	4x 5"
Subwoofer _____	4x 10"
Frequency Response _____	14Hz-23.7KHz -10 dB
Total Amplifier Power _____	1400 Watt
Bass Amplifier _____	700 Watt
Mid/High Amplifier _____	700 Watt
Inputs _____	XLR
Height _____	62.75 in 1594 mm
Base Depth _____	22.25 in 566 mm
Base Width _____	23.44 in 595 mm

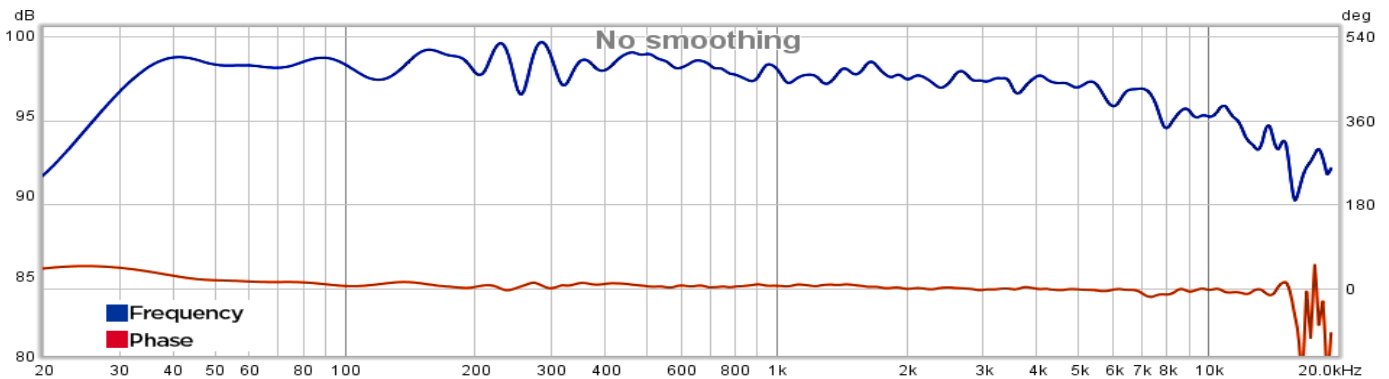

Rev. 20230331